


A

B



C

D

版本 REV. MARK	变更内容 REVISION RECORD	签名 SIGNATURE	日期 DATE
A01	调整接线定义	耿源	2025/7/4



LED_RUN
LED_COM

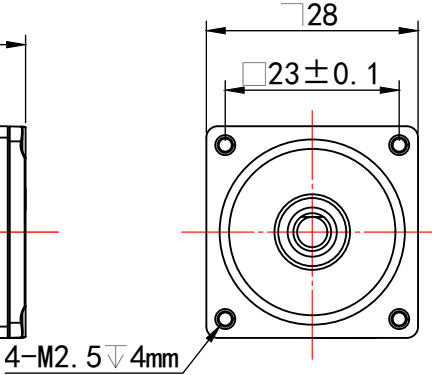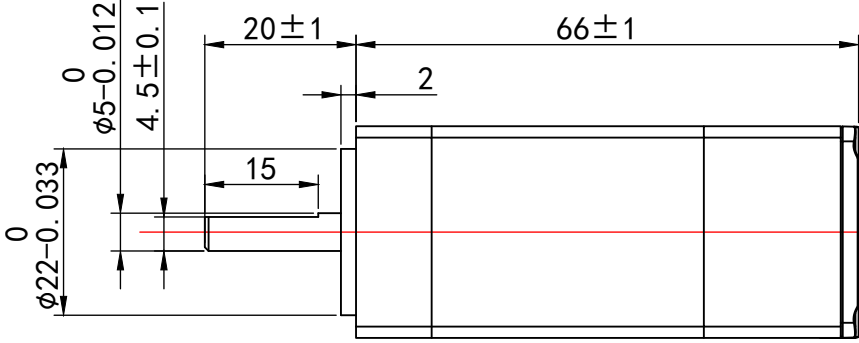

引脚	CAN	RS485
1	CANL	RS485+
2	CANH	RS485-
3	GND	GND
4	D02	
5	D01	
6	GND	
7	DI3	
8	DI2	
9	DI1	
10	GND	
11	VCC	
12	VCC	

电机参数	
额定电压/NOMINAL VOLTAGE	24V
额定转速/RATED SPEED	3000RPM
额定转矩/RATED TORQUE	0.064Nm
额定功率/RATED POWER	20W
额定电流/RATED CURRENT	2A
峰值电流/PEAK CURRENT	4A
峰值转矩/PEAK TORQUE	0.192Nm
转子转动惯量/ROTOR INERTIA	0.01Kg·cm ²
重量/WEIGHT	0.17Kg
绝缘等级/INSULATION CLASS	B

未注尺寸公差 DEFAULT DIMENSIONAL TOLERANCE		未注形位公差 DEFAULT GEOMETRIC TOLERANCE		FIRST ANGLE METHOD		北京立迈胜控制技术有限公司 Beijing Nimotion Control Technology Co., Ltd.				
GB/T 1804-M		GB/T 1184-K								
设计DRAWN	任忠平	2023/10/20	图号 DWG NO.	LMS-C20-24194		型号 MODEL	PMM2802B-XXX-0FS			
审核CHK'D	任君	2023/10/20	物料编码 P/N			名称 TITLE	一体化伺服电机			
批准APPV'D	董春禄	2023/10/20	版本 REV	A01	图幅 SIZE	A4	比例 SCALE	1:1	共 1 张 第 1 张 SHEET 1 OF 1	