



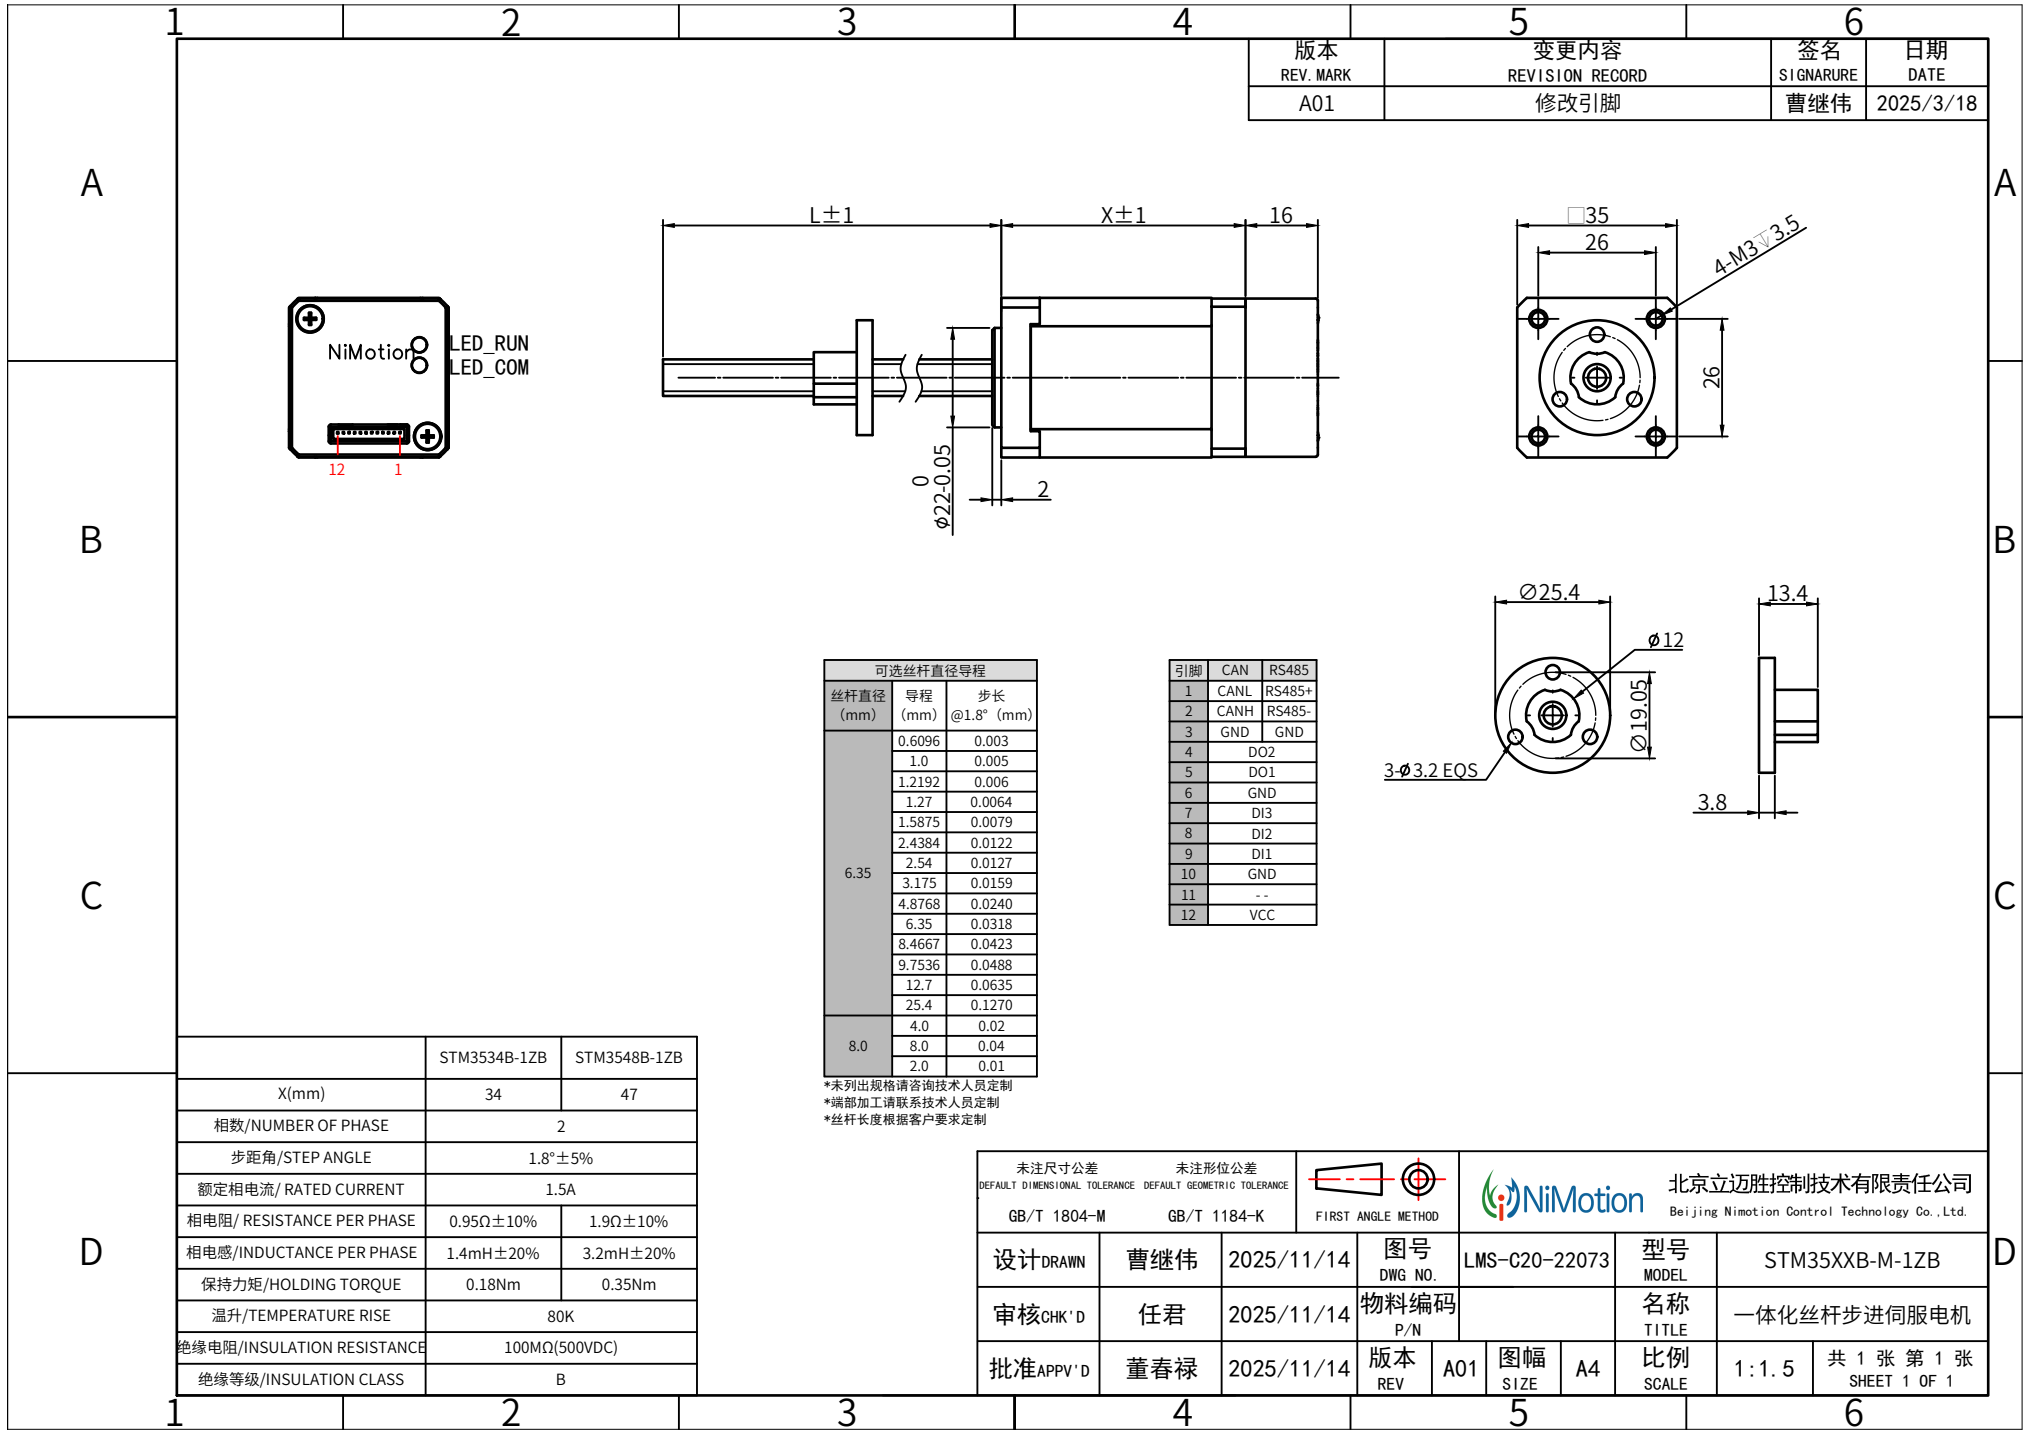

可选丝杆直径导程		
丝杆直径 (mm)	导程 (mm)	步长 @1.8° (mm)
6.35	0.6096	0.003
	1.0	0.005
	1.2192	0.006
	1.27	0.0064
	1.5875	0.0079
	2.4384	0.0122
	2.54	0.0127
	3.175	0.0159
	4.8768	0.0240
	6.35	0.0318
	8.4667	0.0423
	9.7536	0.0488
	12.7	0.0635
	25.4	0.1270
	4.0	0.02
8.0	8.0	0.04
	2.0	0.01

*未列出规格请咨询技术人员定制
*端部加工请联系技术人员定制
*丝杆长度根据客户要求定制

未注尺寸公差		未注形位公差	
DEFAULT DIMENSIONAL TOLERANCE		DEFAULT GEOMETRIC TOLERANCE	
GB/T 1804-M		GB/T 1184-K	



FIRST ANGLE METHOD



北京立迈胜控制技术有限公司
Beijing Nimotion Control Technology Co.,Ltd.

设计DRAWN	曹继伟	2025/11/14	图号 DWG NO.	LMS-C20-22073	型号 MODEL	STM35XXB-M-1ZB
审核CHK'D	任君	2025/11/14	物料编码 P/N		名称 TITLE	一体化丝杆步进伺服电机
批准APPV'D	董春禄	2025/11/14	版本 REV	A01	图幅 SIZE	A4
			比例 SCALE	1:1.5	共 1 张 第 1 张 SHEET 1 OF 1	