
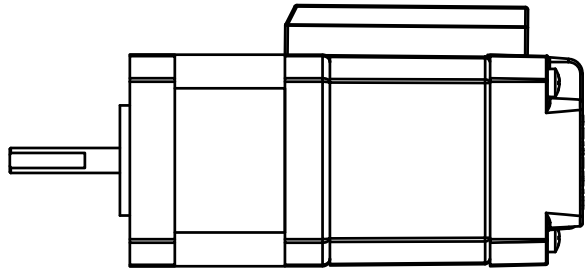
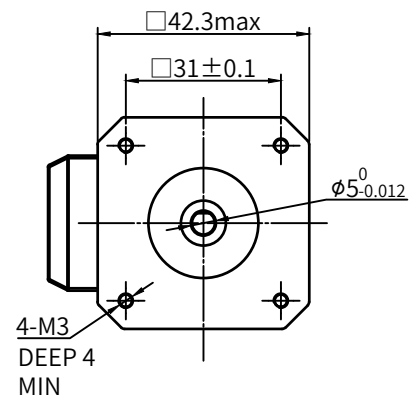
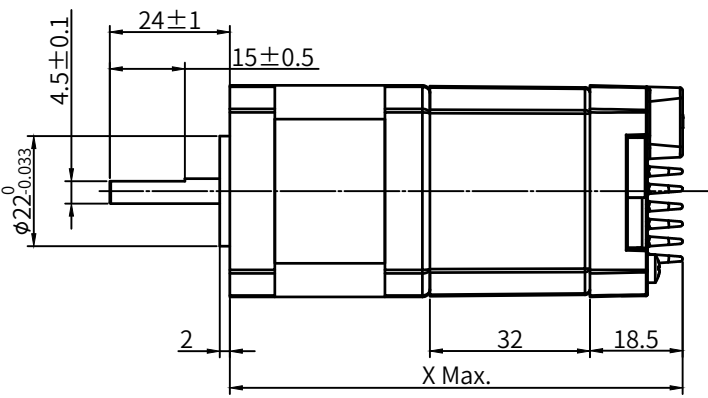


版本 REV.MARK	变更内容 REVISION RECORD	签名 SIGNATURE	日期 DATE
B01	修改引脚	曹继伟	2025/10/16



I/O端口		通讯端口		
引脚	功能	引脚	CAN	485
1	DI1	1	GND	GND
2	GND	2	CANL	485-
3	DI2	3	CANH	485+
4	GND			
5	DI3			
6	GND			
7	DX1			
8	GND			
9	DX2			
10	GND			

电源端口	
引脚	功能
1	VCC
2	GND

型号	X (mm)	重量 (kg)
STM4228(A)-XXX-0FSB	80.5	0.38
STM4234(A)-XXX-0FSB	84.5	0.48
STM4240(A)-XXX-0FSB	90.5	0.53
STM4248(A)-XXX-0FSB	98.5	0.60
STM4260(A)-XXX-0FSB	109.5	0.71

未注尺寸公差 DEFAULT DIMENSIONAL TOLERANCE GB/T 1804-M		未注形位公差 DEFAULT GEOMETRIC TOLERANCE GB/T 1184-K		 FIRST ANGLE METHOD		 北京立迈胜控制技术有限公司 Beijing Nimotion Control Technology Co.,Ltd.			
设计DRAWN	曹继伟	2025/11/14	图号 DWG NO.	LMS-C20-22004	型号 MODEL	STM42XX(A)-XXX-0FSB			
审核CHK'D	任君	2025/11/14	物料编码 P/N		名称 TITLE	一体化刹车步进电机			
批准APPV'D	董春禄	2025/11/14	版本 REV	B01	图幅 SIZE	A4	比例 SCALE	1:1.5	共 1 张 第 1 张 SHEET 1 OF 1