


A

B

C


D

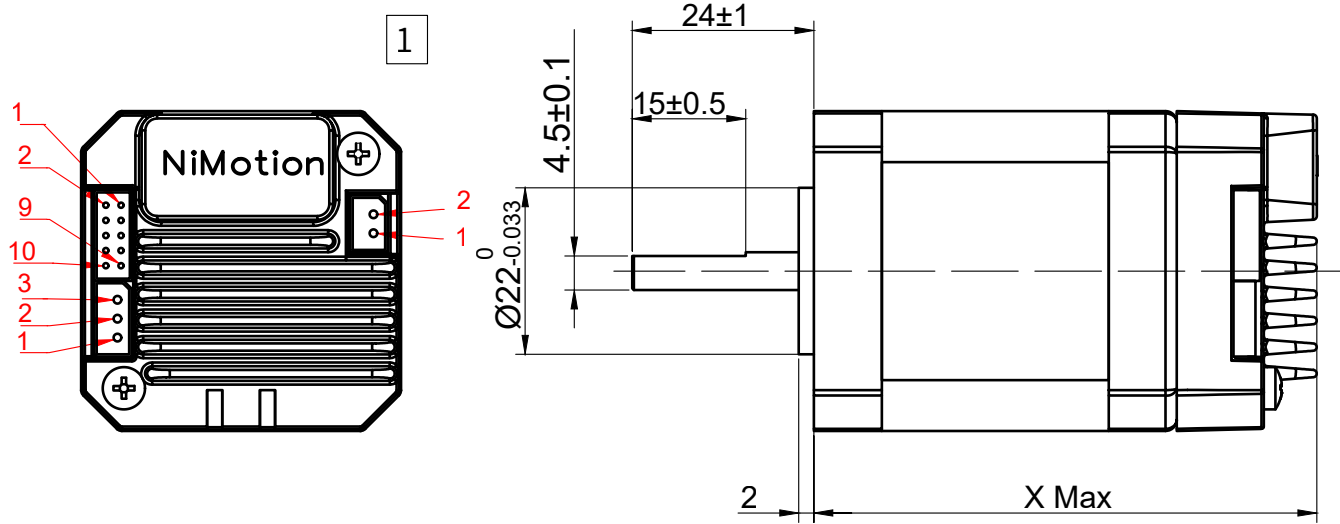

I/O端口	
引脚	功能
1	DI1
2	+5V_COM
3	DI2
4	+24V_COM
5	DI3
6	AI
7	D01
8	GND
9	D02
10	预留

通讯端口		
引脚	CAN	485
1	GND	GND
2	CANL	485+
3	CANH	485-

电源端口	
引脚	功能
1	VCC
2	GND

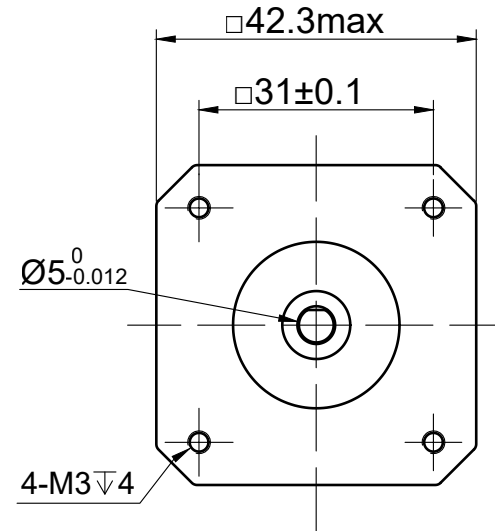

规格	X (mm)
STM4234X-XXX-M-0FS	52.5
STM4240X-XXX-M-0FS	58.5
STM4248X-XXX-M-0FS	66.5
STM4260X-XXX-M-0FS	78.5

未注尺寸公差 DEFAULT DIMENSIONAL TOLERANCE		未注形位公差 DEFAULT GEOMETRIC TOLERANCE		FIRST ANGLE METHOD		北京立迈胜控制技术有限公司 Beijing Nimotion Control Technology Co., Ltd.			
GB/T 1804-M		GB/T 1184-K							
设计DRAWN	孙丞劭	2026/6/23	图号 DWG NO.	LMS-C20-23121		型号 MODEL	STM42XXX-XXX-M-0FS		
审核CHK'D	任君	2026/6/23	物料编码 P/N			名称 TITLE	一体化步进电机		
批准APPV'D	董春禄	2026/6/23	版本 REV	B01	图幅 SIZE	A4	比例 SCALE	1:1	共 1 张 第 1 张 SHEET 1 OF 1