

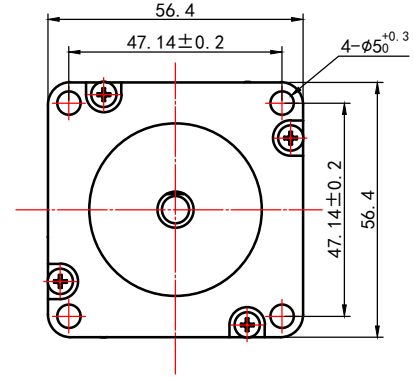
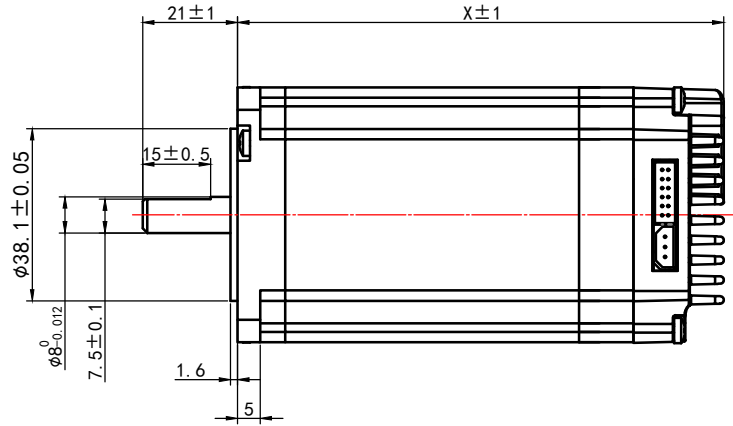





型号	X (mm)
STM5741B	61
STM5756B	76
STM5776B	96
STM57B5B	132

I/O端口	
引脚	功能
1	DI1+
2	DI1-
3	DI2+
4	DI2-
5	DI3+
6	DI3-
7	DO1
8	-
9	GND
10	CTRL_POW
11	AGND
12	AI1

通讯端口		
引脚	CAN	485
1	CANH	485-
2	CANL	485+
3	GND	GND




通讯端口



I/O端口


2 1
4 3
6 5
8 7
10 9
12 11



电源

VCC_VM
GND

未注尺寸公差 未注形位公差
DEFAULT DIMENSIONAL TOLERANCE DEFAULT GEOMETRIC TOLERANCE
GB/T 1804-M GB/T 1184-K



FIRST ANGLE METHOD



北京立迈胜控制技术有限公司
Beijing Nimotion Control Technology Co., Ltd.

设计DRAWN	孙岩	2026/4/30	图号 DWG NO.	LMS-C20-26081	型号 MODEL	STM57XXB-XXX-ME-0FS
审核CHK'D	任君	2026/4/30	物料编码 P/N		名称 TITLE	一体化步进电机
批准APPV'D	董春禄	2026/4/30	版本 REV	A	图幅 SIZE	A4
					比例 SCALE	1:1.5
						共 1 张 第 1 张 SHEET 1 OF 1