
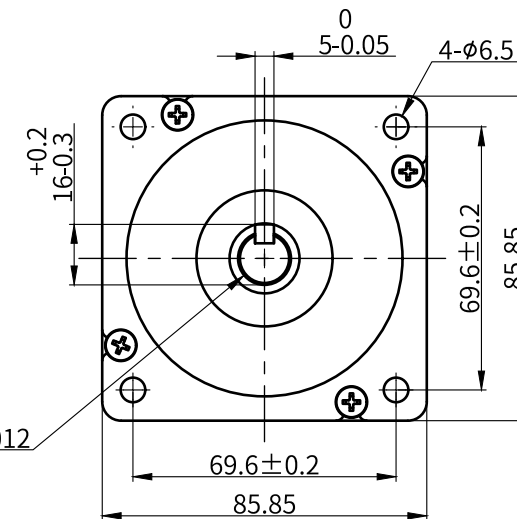
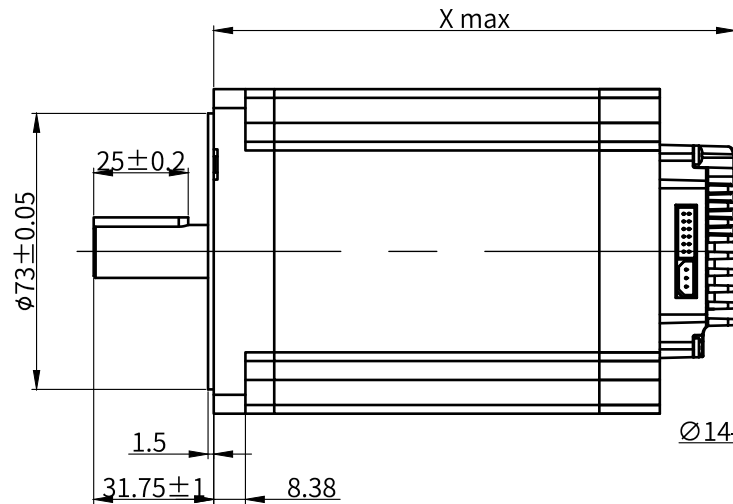


A

B


C

D

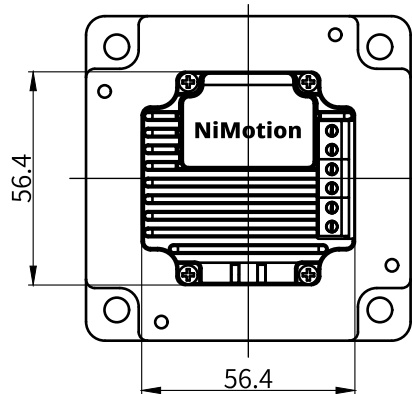

I/O端口	
引脚	功能
1	DI1+
2	DI1-
3	DI2+
4	DI2-
5	DI3+
6	DI3-
7	DO1
8	-
9	GND
10	CTRL_POW
11	AGND
12	AI1

通讯端口			
引脚	CAN	485	
1	CANH	485-	
2	CANL	485+	
3	GND	GND	

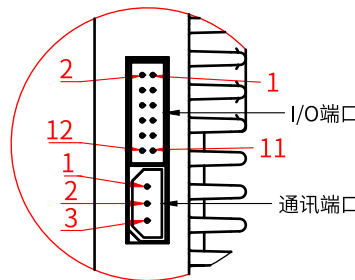

型号	X(mm)
STM8665B-XXX-PE-0HS	85
STM8680B-XXX-PE-0HS	100
STM86B8B-XXX-PE-0HS	138
STM86F6B-XXX-PE-0HS	176

未注尺寸公差 DEFAULT DIMENSIONAL TOLERANCE		未注形位公差 DEFAULT GEOMETRIC TOLERANCE				 北京立迈胜控制技术有限公司 Beijing Nimotion Control Technology Co.,Ltd.			
GB/T 1804-M		GB/T 1184-K		FIRST ANGLE METHOD					
设计DRAWN	耿源	2026/3/28	图号 DWG NO.	LMS-C20-26054		型号 MODEL	STM86XXB-XX-PE-0HS		
审核CHK'D	耿源	2026/3/28	物料编码 P/N			名称 TITLE	一体化步进电机		
批准APPV'D	任君	2026/3/28	版本 REV	A	图幅 SIZE	A4	比例 SCALE	1:2	共 1 张 第 1 张 SHEET 1 OF 1