
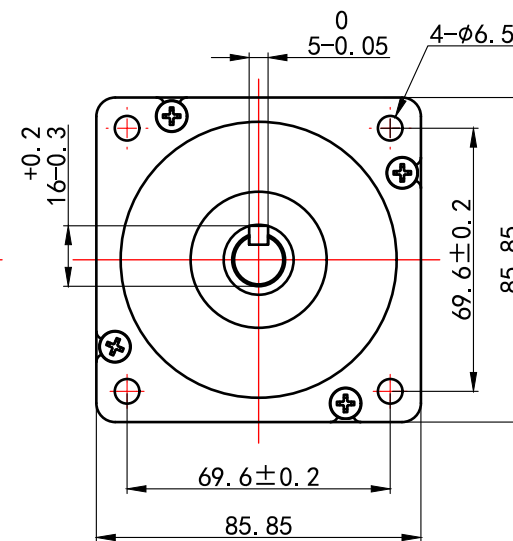
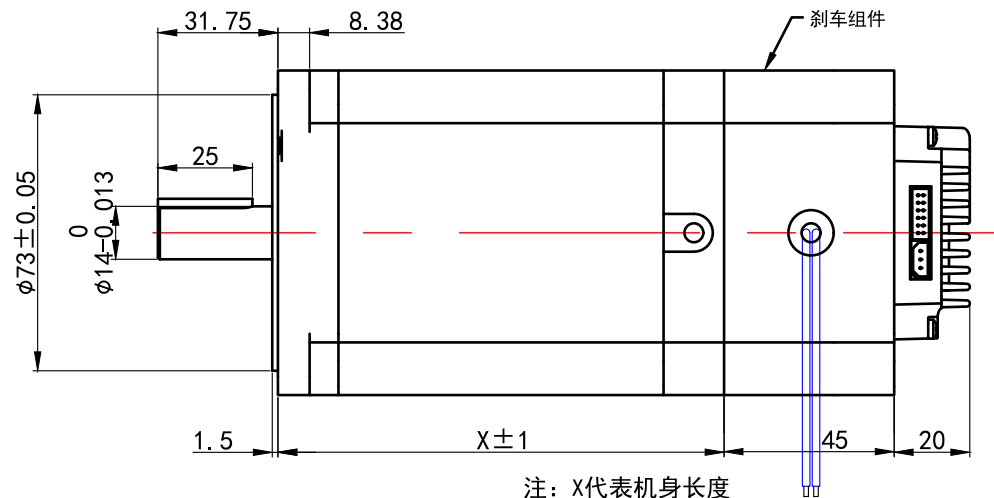


A

B


C

D

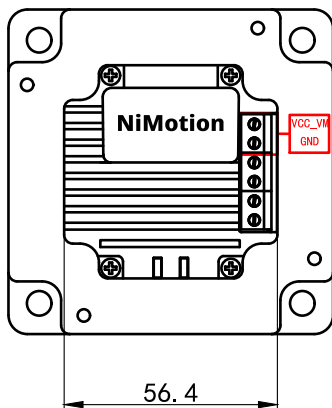

I/O端口	
引脚	功能
1	DI1+
2	DI1-
3	DI2+
4	DI2-
5	DI3+
6	DI3-
7	D01
8	-
9	GND
10	CTRL_POW
11	AGND
12	A11

通讯端口		
引脚	CAN	485
1	CANH	485-
2	CANL	485+
3	GND	GND

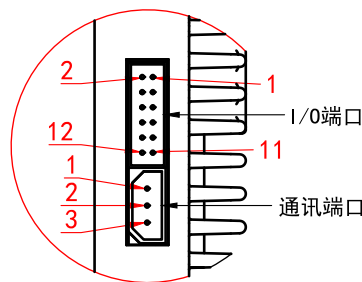


刹车

颜色	电压
红	DC+ (24V)
黑	DC-

型号	X (mm)	重量 (kg)
STM8665B-XX-PE-0HSB	65	1.8
STM8680B-XX-PE-0HSB	80	2.4
STM86B8B-XX-PE-0HSB	118	3.9
STM86F6B-XX-PE-0HSB	156	5.4

未注尺寸公差
DEFAULT DIMENSIONAL TOLERANCE
GB/T 1804-M

未注形位公差
DEFAULT GEOMETRIC TOLERANCE
GB/T 1184-K



FIRST ANGLE METHOD



北京立迈胜控制技术有限公司
Beijing Nimotion Control Technology Co., Ltd.

设计DRAWN	耿源	2026/3/28	图号 DWG NO.	LMS-C20-26055	型号 MODEL	STM86XXB-XX-PE-0HSB
审核CHK'D	耿源	2026/3/28	物料编码 P/N		名称 TITLE	一体化步进电机
批准APPV'D	任君	2026/3/28	版本 REV	A	图幅 SIZE	A4
					比例 SCALE	1:2
						共 1 张 第 1 张 SHEET 1 OF 1